

Yale VS III

In order to serve all industries (even the paper- or the ship industry), the VS III lifts the loads very sensitively, as the components and construction parts have been positioned very precisely.


CAPACITY 10000 - 50000 kg

INFO

To avoid bruising or injuries, the chain inlet as well as the top hook connection is covered in protective material.

INFO

The hand chain hoist VS III from 10000 kg upwards can be used in combination with trolleys.

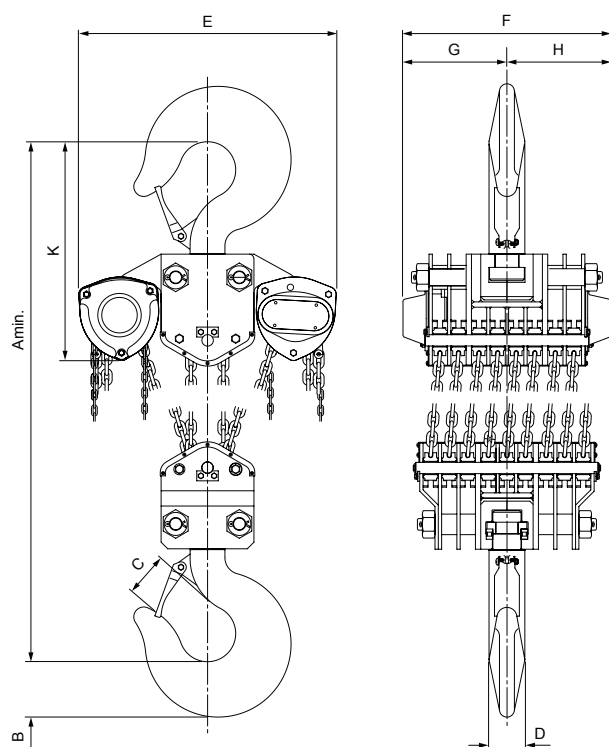

Model VS III, 50000 kg, eighteen chain falls




Technical data model VSIII

Model	EAN-No 4025092* 4053981**	Capacity in kg/ number of chain falls	Chain dimensions d x p mm	Lift per 1 m hand chain overhaul mm	Handle pull at WLL daN	Weight at standard lift (3 m) kg
VSIII 10/4	**981574	10000/4	10x30	2.84	37	78.5
VSIII 20/8	**981581	20000/8	10x30	1.42	44.5	197
VSIII 30/12	**981598	30000/12	10x30	0.83	46.3	268
VSIII 50/18	**981604	50000/18	10x30	0.56	53.6	540

Dimensions model VSIII


Model	VSIII 10/4	VSIII 20/8	VSIII 30/12	VSIII 50/18
A min., mm	860	950	1112	1700
B, mm	63	90	90	165
C, mm	65	86	85	135
D, mm	47	69	67	108
E, mm	463	860	704	776
F, mm	104	200	410	627
G, mm	55	100	225	314
H, mm	50	100	186	314
K, mm	448	508	528	656

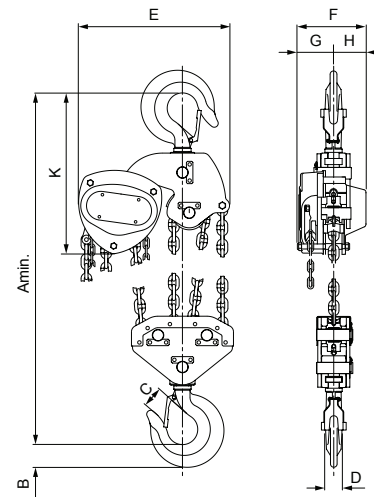


Model VSIII, 10000 kg, four chain falls

SERIES EXTENSION

NOW WITH HIGH SWL!
10000 - 50000 kg *new!*

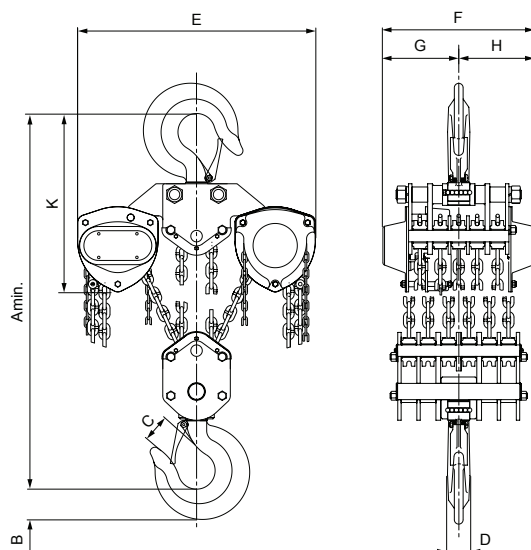

Model VSIII, 30000 kg, twelve chain falls

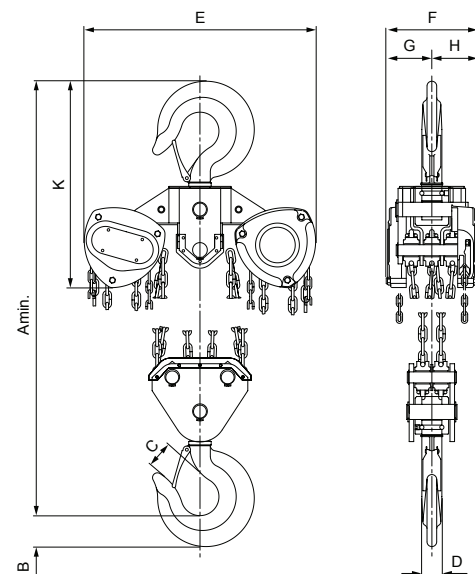

Model VSIII, 20000 kg, eight chain falls