



Harpsluiting met moerbout Type G-2130

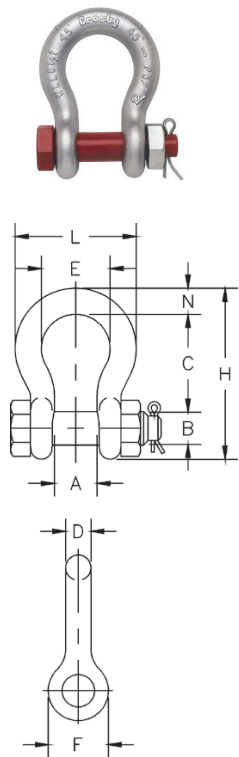

G-2130															
Type	Veilige werklas t	Art.nr.	Gewicht kg/st	Afmetingen mm										Tolerantie +/-	
				A	B	C	D	E	F	H	L	N	C	A	
3/16	0.3	7011019464	.03	9.65	6.35	22.4	4.85	15.2	14.2	37.3	24.9	4.85	1.50	1.50	
1/4	0,5	7011019466	.05	11.9	7.85	28.7	6.35	19.8	15.5	46.7	32.5	6.35	1.50	1.50	
5/16	0,75	7011019468	.10	13.5	9.65	31.0	7.85	21.3	19.1	53.0	37.3	7.85	3.30	1.50	
3/8	1	7011019470	.15	16.8	11.2	36.6	9.65	26.2	23.1	63.0	45.2	9.65	3.30	1.50	
7/16	1,5	7011019471	.22	19.1	12.7	42.9	11.2	29.5	26.9	74.0	51.5	11.2	3.30	1.50	
1/2	2	7011019472	.36	20.6	16.0	47.8	12.7	33.3	30.2	83.5	58.5	12.7	3.30	1.50	
5/8	3,25	7011019490	.62	26.9	19.1	60.5	16.0	42.9	38.1	106	74.5	17.5	6.35	1.50	
3/4	4,75	7011019515	1.23	31.8	22.4	71.5	19.1	51.0	46.0	126	89.0	20.6	6.35	1.50	
7/8	6,5	7011019533	1.79	36.6	25.4	84.0	22.4	58.0	53.0	148	102	24.6	6.35	1.50	
1	8,5	7011019551	2.28	42.9	28.7	95.5	25.4	68.5	60.5	167	119	26.9	6.35	1.50	
1-1/8	9,5	7011019579	3.75	46.0	31.8	108	28.7	74.0	68.5	190	131	31.8	6.35	1.50	
1-1/4	12	7011019597	5.31	51.5	35.1	119	31.8	82.5	76.0	210	146	35.1	6.35	1.50	
1-3/8	13,5	7011019613	7.18	57.0	38.1	133	35.1	92.0	84.0	233	162	38.1	6.35	3.30	
1-1/2	17	7011019631	8.62	60.5	41.4	146	38.1	98.5	92.0	254	175	41.1	6.35	3.30	
1-3/4	25	7011019659	15.4	73.0	51.0	178	44.5	127	106	313	225	57.0	6.35	3.30	
2	35	7011019677	23.7	82.5	57.0	197	51.0	146	122	348	253	61.0	6.35	3.30	
2-1/2	55	7011019695	44.6	105	70.0	267	66.5	184	145	453	327	79.5	6.35	6.35	
3	*85	7011019711	70	127	82.5	330	76.0	200	165	546	365	92.0	6.35	6.35	
3-1/2	*120**	7011019739	120	133	95.5	372	92.0	229	203	626	419	105	6.35	6.35	
4	*150**	7011019757	153	140	108	368	104	254	229	653	468	116	6.35	6.35	
* Individueel beproefd met certificering. ** Ingericht in stijl met anker alleen en ingericht met ronde kopbouten met gelaste handgrepen.															

Stalen Harpsluitingen met moerbout Type G-2140

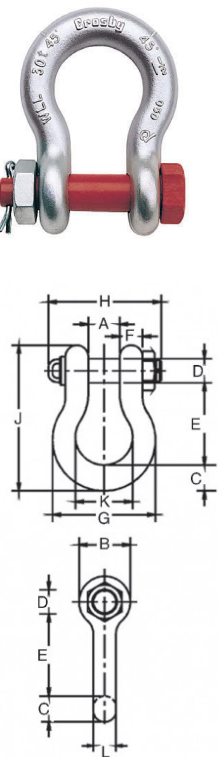

G-2140																	
Type	Veilige werklas t	Art.nr.	Gewicht kg/st	Afmetingen mm												Tolerantie +/-	
				A	B	C	D	E	F	G	H	J	K	L	A	E	
1-1/2	30	7011021110	8.52	60.5	91.9	41.1	41.4	146	35.3	175	196	254	98.6	38.9	3.3	6.4	
1-3/4	40	7011021138	15.4	73.2	106	57.2	50.8	178	44.5	224	237	313	127	46.7	3.3	6.4	
2	55	7011021156	23.6	82.6	122	61.0	57.2	197	50.8	258	264	347	146	52.8	3.3	6.4	
2-1/2	85	7011021174	43.5	105	148	79.2	69.9	267	66.5	324	345	455	184	68.8	6.4	6.4	
3	120	7011021192	81	127	165	92.2	82.6	330	76.2	371	384	546	200	79.2	6.4	6.4	
3-1/2	* 150	7011021218	120	133	203	111	95.3	372	95.3	432	448	632	229	91.9	6.4	6.4	
4	* 175	7011021236	153	140	229	116	108	368	102	457	517	652	254	102	6.4	6.4	
7**	* 400	7011021478	500	210	356	184	178	572	165	660	728	1022	330	152	6.4	6.4	

* Ingericht met ronde kopbouten met gelaste greep

** Gegoten gelegerd staal