



D-sluiting met borstbout
Type G-4151

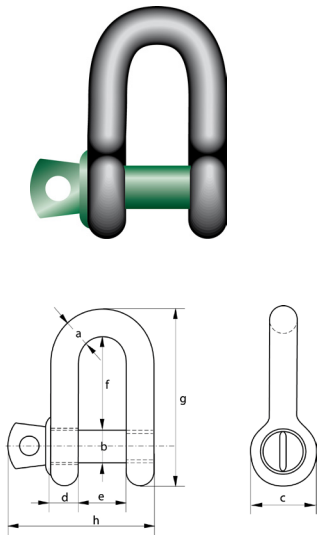

G-4151										
Veilige werklast t	Art.nr.	Gewicht kg/st	Afmetingen mm							
			A	B	C	D	E	F	G	H
0,33	7020G4151033	0,02	5	6	12	5	9,5	19	33	29,5
0,5	7020G415105	0,05	7	8	16,5	7	12	22	41,5	38
0,75	7020G4151075	0,09	9	10	20	9	13,5	26	50	46,5
1	7020G41511	0,14	10	11	22,5	10	17	32	59	54
1,5	7020G415115	0,19	11	13	26,5	11	19	37	68	59,5
2	7020G41512	0,32	13,5	16	34	13	22	43	81	73
3,25	7020G4151325	0,54	16	19	40	16	27	51	97	89
4,75	7020G4151475	0,87	19	22	46	19	31	59	112	103
6,5	7020G415165	1,34	22	25	52	22	36	73	134	119
8,5	7020G415185	2,08	25	28	59	25	43	85	154	137
9,5	7020G415195	2,77	28	32	66	28	47	90	167	153
12	7020G415312	3,72	32	35	72	32	51	94	180	170
13,5	7020G4153135	5,14	35	38	80	35	57	115	209	186
17	7020G415317	6,85	38	42	88	38	60	127	230	203
25	7020G415325	11,45	45	50	103	45	74	149	271	243
35	7020G415335	16,86	50	57	111	50	83	171	305	272
42,5	7020G4153425	24,61	57	65	130	57	95	190	345	310
55	7020G415355	32,65	65	70	145	65	105	203	376	344

D-sluiting met moerbout
Type G-4153

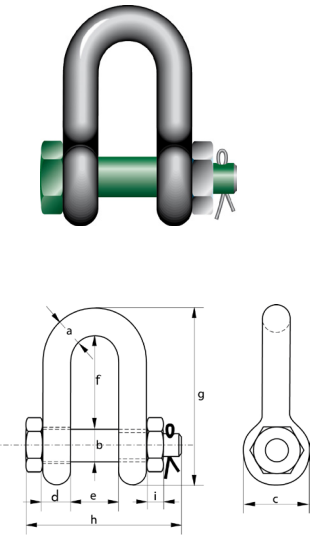

G-4153											
Veilige werklast t	Art.nr.	Gewicht kg/st	Afmetingen mm								
			A	B	C	D	E	F	G	H	I
2	7020G41532	0,39	13,5	16	34	13	22	43	81	82	13
3,25	7020G4153325	0,67	16	19	40	16	27	51	97	98	17
4,75	7020G4153475	1,08	19	22	46	19	31	59	112	114	19
6,5	7020G415365	1,66	22	25	52	22	36	73	134	130	22
8,5	7020G415385	2,46	25	28	59	25	43	85	154	150	25
9,5	7020G415395	3,4	28	32	66	28	47	90	167	166	27
12	7020G415312	4,51	32	35	72	32	51	94	180	178	30
13,5	7020G4153135	6,1	35	38	80	35	57	115	209	197	33
17	7020G415317	7,63	38	42	88	38	60	127	230	202	19
25	7020G415325	12,88	45	5	103	45	74	149	271	249	23
35	7020G415335	17,35	50	57	111	50	83	171	305	269	26
42,5	7020G4153425	25,94	57	65	130	57	95	190	345	301	29
55	7020G415355	35,33	65	70	145	65	105	203	376	330	32
85	7020G4153850	52,97	75	83	162	73	127	229	427	380	39